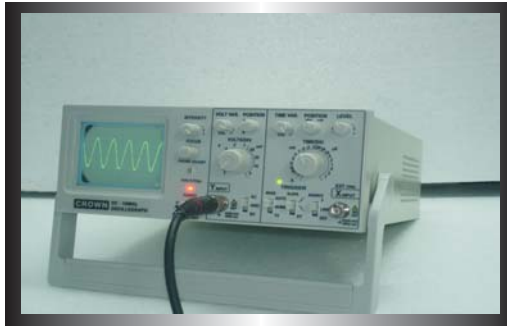


CROWN**DC - 10 MHz OSCILLOSCOPE****TECHNICAL SPECIFICATIONS :****VERTICAL SYSTEM :**

Sensitivity	:	5 mV / DIV ~ 5V / DIV , $\pm 3\%$
Trimming Ratio	:	$\geq 2.5 : 1$
Rise Time	:	≤ 35 ns
Band Width (-3db)	:	DC : 0 ~ 10MHz, C : 10Hz ~ 10MHz
Input Impedance	:	$1M\Omega \pm 3\%$, 30 pF , 5 pF Ω
Maximum Input Voltage	:	400 V pk

HORIZONTAL SYSTEM :

Sweep Time	:	0.1 s / DIV ~ 0.1 μ s / DIV , $\pm 3\%$
Trimming Ratio	:	$\geq 2.5 : 1$

TRIGGER SYSTEM :

Trigger Sensitivity	:	INT : 1 DIV , EXT : 0.3V
Ext. Trigger Input Impedance	:	$1M\Omega \pm 3\%$, 30 pF , ± 5 pF
Ext. Trigger Max. Input Voltage	:	400 V pk
Trigger Sources	:	INT , LINE , EXT
Trigger Mode	:	NORM , AUTO , TV

MODE :

Sensitivity	:	0.5V / DIV
Bandwidth (-3db)	:	10 Hz ~ 500KHz

CALIBRATION SIGNAL :

Waveform	:	Symmetric Square Wave
Range	:	$0.5V \pm 2\%$
Frequency	:	1KHz $\pm 2\%$

CRT :

Display Area	:	8 X 100 DIV (1 DIV = 6mm)
Acceleration Voltage	:	1200 V
Display Color	:	Green

Power	:	220V , $\pm 10\%$, 50 Hz
-------	---	---------------------------

=====

For Further Details Please Contact :

CROWN ELECTRONIC SYSTEMS**(AN ISO 9001: 2000 certified company)**

**69/2A , IInd FLOOR , NAJAFGARH ROAD INDL. AREA , NEAR MOTI NAGAR CROSSING
NEW DELHI-110015**

Visit us at: www.Crownelectronicssystem.com

E-mail: crownelectronicssystem@yahoo.com

PH : 011- 64508649-50 , 25995324 , Tele Fax : 011- 45013465

CROWN OFFERS YOU A WIDE RANGE OF: OSCILLOSCOPE , AUDIO OSCILLATOR , FUNCTION GENERATOR , DC REGULATED POWER SUPPLY, DIGITAL FREQUENCY COUNTER/ MILLI OHM METER/ pH METER/ DPM,s FOR V,A, Hz., AND WATT, VTVM, LCR METER, HIGH VOLTAGE BREAK DOWN TESTER, AF POWER OUTPUT METER, AND ALL OTHER INSTRUMENTS, COMPONENTS AND ACCESSORIES, FOR ELECTRONICS AND ELECTRICAL LAB.